PLYMFIVENT[®] clean air at work



A standalone general welding fume filtration system with a new integrated control system



DO YOU CONTROL DUST AND WELDING FUMES?

We do. Controlling welding fumes in a welding workshop significantly contributes to a better work environment. Simply by keeping the background concentration of welding fumes as low as possible. This can be realised by using the right welding processes and by using a high-quality welding fume extraction and filtration system that prevents the accumulation of welding fumes in your workshop.

As a specialist in air cleaning technology, Plymovent offers various solutions to control welding fumes in the metalworking industry, like source extraction, extraction hoods and general ventilation and filtration systems. All designed to remove and control welding fumes as best as possible.



DILUTER SYSTEM

The Diluter system is a stand alone general filtration system, developed to reduce and control the background concentration of welding fumes in a workshop. It makes sure that legal limits for welding fumes are not exceeded.

Diluter systems are the ideal solution if source extraction and hoods are not an option, for example when large work pieces are being fabricated, various welding processes take place at changing locations or when ductwork is difficult to install.

HOW DOES IT WORK

- The blue haze of welding fumes, caused by the risen fumes that concentrate between four and six meters above the floor, is continuously mixed with clean air injected by nozzles.
- You and your personnel immediately see that the blue haze disappears.
- The injection of clean air is done by filtered air from the workshop, completely adaptable in volume and direction to your situation.
- The background concentration is kept under control by continuously cleaning workshop air.
- Filter is cleaned automatically and residue is collected in a dustbin
- The fan speed is controlled and adaptable to need by a frequency inverter. This saves energy, expands filter life and ensures a constant and reliable performance.



BENEFITS

- Energy saving; a re-circulation concept (expensive heated or cooled air stays within the workshop)
- Stand-alone without fixed duct work, less installation costs
- Flexible
- Relatively small investment for controlling welding fume
- Healthier and cleaner working environment
- It isn't just about the welder; welders and other people will notice the difference immediately



TWO VERSIONS OF FILTER CONTROLS

The Diluter will be available with the new filter controls of Plymovent; the ControlPro and the ControlGo. The Diluter-PRO is fitted with the ControlPro.This version has a control with an intuitive touchscreen interface that shows at a glance how the system is performing, what the system is doing now, will do next and how to keep it in shape. An extensive and very accessible menu allows full adaptability in an easy way. ControlPro uses ethernet communication for a wide variety of connectivity options. ControlPro is the control that meets the full needs of the professional user: Simple, Insight, Connected.

Direction and volume control

SIMPLE INSIGHT CONNECTED


The Diluter-GO has integrated the control: the ControlGo. The ControlGo is built on the same platform as the ControlPro, offering the same performance, but with preset configurations for the user with basic needs. The Diluter-GO uses push buttons and indicator lights for simple interaction and meets the basic needs of any user.

Main features [*]	Diluter-GO	Diluter-PRO
Intelligent filter cleaning	\checkmark	\checkmark
Connection for external devices	\checkmark	\checkmark
Software updates	\checkmark	\checkmark
7" touch display		\checkmark
Data logging		\checkmark
Auto start/stop by weekly timer		\checkmark
Network connection		\checkmark

TECHNICAL SPECIFICATIONS

Weight (net)	800 kg (1764 lbs)	Power connection	400-690V/3 phase / 50Hz
Fan type	radial	Motor protection	ву РТС
Power consumption fan	7,5 kW (10 HP)	Filter control	PLC with LCD display
Connection voltage	400-690V/3~/50Hz	Fan control	VFD with Pressure sensor
Insulation class fan	F with PTC	Panel	IP 54
Nominal current	13,9 A	Fan speed control	Variable Frequency Drive with PID control function
Protection class	IP 54	Instruments	PID set point measured by pressure
Filter area	150 m² (1615 ft²)		sensor and transmitter

DIMENSIONS

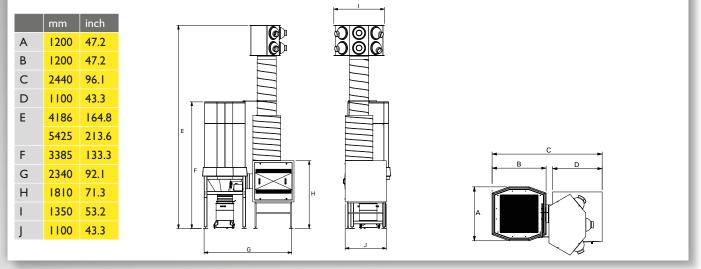

PLYMFJVENT®

clean air at work

International Distributor Sales

Plymovent Group BV Koraalstraat 9 1812 RK Alkmaar The Netherlands

T +31 (0)72 5640 600 F +31 (0)72 5644 469 E export@plymovent.com

PLYMOVENT OFFERS TOTAL SOLUTIONS FOR AIR CLEANING

For over 45 years, Plymoventhas been gaining experience in the field of air cleaning. We not only have extensive knowledge of the extraction and filtration of welding fumes and oil mist in metalworking industries, we are also specialised in the removal of vehicle exhaust fumes.

Your authorised Plymovent distributor:

Plymovent cares about the air you breathe. We offer products, systems and services which ensure clean air at work, anywhere in the world.

We respect the environment and we deliver high-quality products. Our expertise gained over many years and our genuine commitment to customer requirements enable us to provide precisely the solutions you need.