

MONOGO^{plus}

STATIONARY FILTER UNIT WITH METAL TUBE

ARM

The MonoGo^{plus} is a stationary welding fume filter with built-in fan and a metal tube arm (KUA). It contains a disposable filter package.

The MonoGo^{plus} is a basic extractor. It has been designed for the consumption of approx. 2 coils of solid wire or 15 kg/33 lbs of electrodes per month.



APPLICATIONS

The MonoGo^{plus} is intended to be used for the following applications:

- MIG-MAG/GMAW welding
- TIG welding
- FCAW welding
- stick/MMAW welding
- grinding
- polishing
- finishing



SPECIFICATIONS

Physical dimensions and properties

Material (housing):	electro-zinc coated steel (according to DIN EN 10152)
• steel grade	• DC01+ZE
• steel grade no.	• 1.0330
Colour	yellow RAL 1004 grey RAL 7011
Weight (net), excl. arm	79,5 kg (175 lbs)
Mains cord	not included

Extraction arm

Type	KUA
Material	metal tube
Diameter	Ø 160 mm (6.3 in.)
Hood opening	Ø 300 mm (11.8 in.)
Length:	
• KUA-2	• 2 m (6.6 ft)
• KUA-3	• 3 m (9.8 ft)
• KUA-4	• 4 m (13.1 ft)
Weight:	
• KUA-2	• 12 kg (26.5 lbs)
• KUA-3	• 15,5 kg (34.2 lbs)
• KUA-4	• 18 kg (39.7 lbs)


Filters

Pre filter cassette:	
• material	• polyester
• filter surface	• 1 m ² (10.8 ft ²)
• efficiency	• G4 according to EN 779
• washable	• no
HEPA filter cassette:	
• material	• glass fibre
• filter surface	• 26 m ² (280 ft ²)
• efficiency	• HEPA E12 according to EN 1822:2009


• washable	• no
Welding fume class	
W3	according to ISO 15012-1:2013
Performance	
Fan type	radial
Extraction capacity (incl. extraction arm)	max. 850 m ³ /h (500 CFM)
Fan speed	2800 rpm
Noise level (according to ISO 3746)	67 dB(A)
Electrical data	
Power consumption	1,1 kW (1.5 HP)
Available connection voltages	• 115V/1ph/50Hz (115) • 115V/1ph/60Hz (116) • 230V/1ph/50Hz (215)
Motor design	IEC
Energy efficiency	<i>n.a. for single phase motors</i>
Ambient and process conditions	
Process temperature:	
• min.	• 5°C (41°F)
• nom.	• 20°C (68°F)
• max.	• 70°C (158°F)
Max. relative humidity	90%
Suitable for outdoor use	no
Storage conditions	• 5-45°C (41-113°F) • relative humidity max. 80%
Scope of supply	
Stationary filter unit, incl. fan and wall bracket – Extraction arm (pre-assembled) – Rotating flange – Arm swivel ring, incl. rubber collar – Extraction hood – Hood collar with safety mesh – Mounting material – Switch box	

Type	MonoGo ^{plus} /2m	MonoGo ^{plus} /3m	MonoGo ^{plus} /4m
■ Order information			
Connection voltage	Article no.	Article no.	Article no.
115V/1ph/50Hz	0000111460	0000111480	0000111492
115V/1ph/60Hz	0000111461	0000111481	0000111493
230V/1ph/50Hz	0000111459	0000111479	0000111491
Number/package	1	1	1
■ Logistics data			
Gross weight (incl. pallet)	107 kg (236 lbs)	110 kg (243 lbs)	111 kg (245 lbs)
Packing dimensions (incl. pallet)	800 x 1200 x 1750 mm (31.5x47.2x68.9 in.)	800 x 1200 x 2250 mm (31.5x47.2x88.6 in.)	800 x 1200 x 2250 mm (31.5x47.2x88.6 in.)
Max. number/pallet	2	2	2
Harmonized Tariff Code	84213925	84213925	84213925

DIMENSIONS

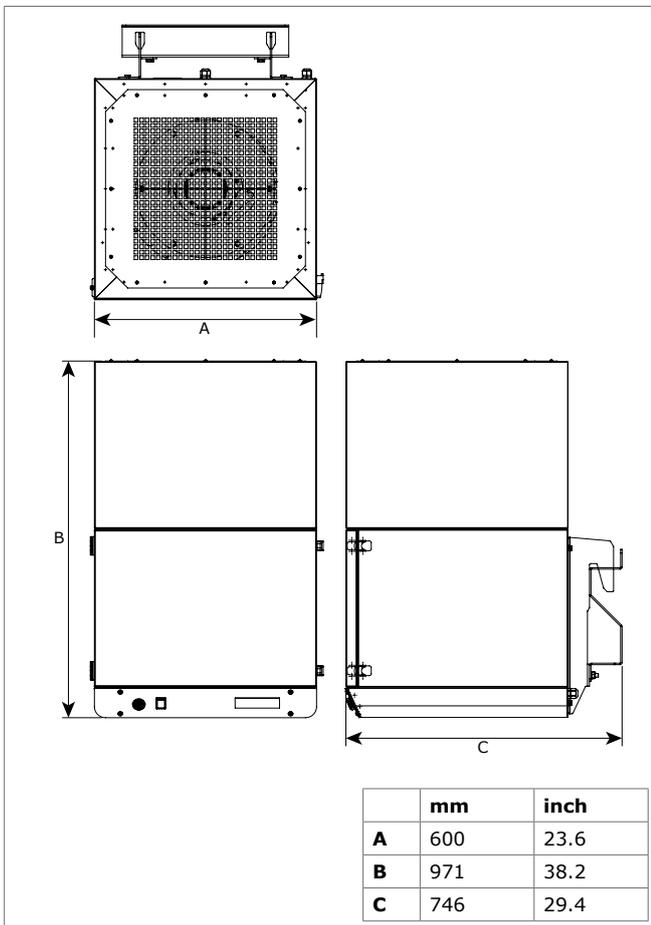

WORKING RANGE

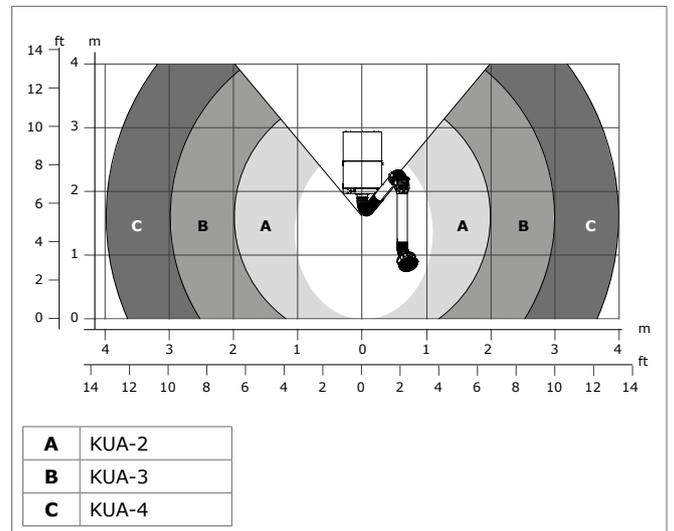

FEATURES & BENEFITS



Compact design



Remote control



Service indicator (buzzer)

APPROVALS/CERTIFICATES

	
	Directive 2011/65/EC (RoHS) valid as of 8 June 2011

Application restrictions

Do **not** use the product for the following applications or in the following circumstances: polishing applications in combination with grinding, welding or any other application that generate sparks (fibres from polishing or abrasive flap disks are highly flammable and pose a high risk of filter fires when exposed to sparks) | aluminium laser cutting | oil mist | heavy oil mist in welding fume | arc-air gouging | extraction of aggressive fumes and gases (e.g. from acids, from alkaline, from soldering paste containing lithium) | extraction of hot gases (more than 70°C/158°F continuously) | grinding aluminum and magnesium | flame spraying | extraction of cement, saw dust, wood dust etc. | sucking cigarettes, cigars, oiled tissues and other burning particles, objects and acids | explosive environments or explosive substances/gases

Product type

MonoGo^{plus}

Article no.

refer to Order information

Product category

stationary filter units

Version

280917/G

Always check the latest version on www.plymovent.com